


W-S BAND PEEL AND STICK

DESCRIPTION: Self-adhesive waterproofing membrane band made of WATER-STOP. Offers an easier and faster alternative to other conventional solutions.

USE: Joint sealing.

NORMATIVE REFERENCES: ANSI A118.10, ANSI A118.12, TCNA Handbook; IAPMO Listed Product File Number 9205 9990.



REFERENCES:

REF.	DESCRIPTION	SIZE
IGU6031	W-S BAND PEEL AND STICK	5" x 65'7" (12 x 20 cm)



TEST TABLE:

PROPERTY	TEST METHOD	VALUE
Seam Strength	ASTM D 751	24 lbs./in.
Breaking Strength Transverse	ASTM D 751 Proc. B	1420 psi
Breaking Strength Longitudinal	ASTM D 751 Proc. B	1160 psi
Dimensional Stability	ASTM D 1204	±0.2%
Waterproofness	ASTM D 4068	Pass
Water Vapor Transmission	ASTM E96 Proc. E	0.3 Perm
Crack Resistance	ANSI 118.12	Rated Standard Performance
Service Requirement	ASTM C627-10	Rated Light commercial (TCNA)
Shear Strength		
7- Day Dry	ASTM C482	119 psi
7- Day Water Immersion		83 psi
4- Week		133 psi
12- Week		138 psi
100- Day Water Immersion		85 psi
Resistance to temperature		-22°F / +176°F
Total thickness (approximate)	EN 1849-2	20 mils


AREAS OF APPLICATION:

W-S Band Peel and Stick is suitable for the following intended uses:

- » Flat, clean surfaces with no water pressure.
- » Joint between W-S BOARD and W-S BOARD
- » Covering joints between W-S BOARD and W-S NICHE
- » DO NOT use between floor and wall or in corners.

TECHNICAL DRAWINGS:

W-S BAND PEEL AND STICK

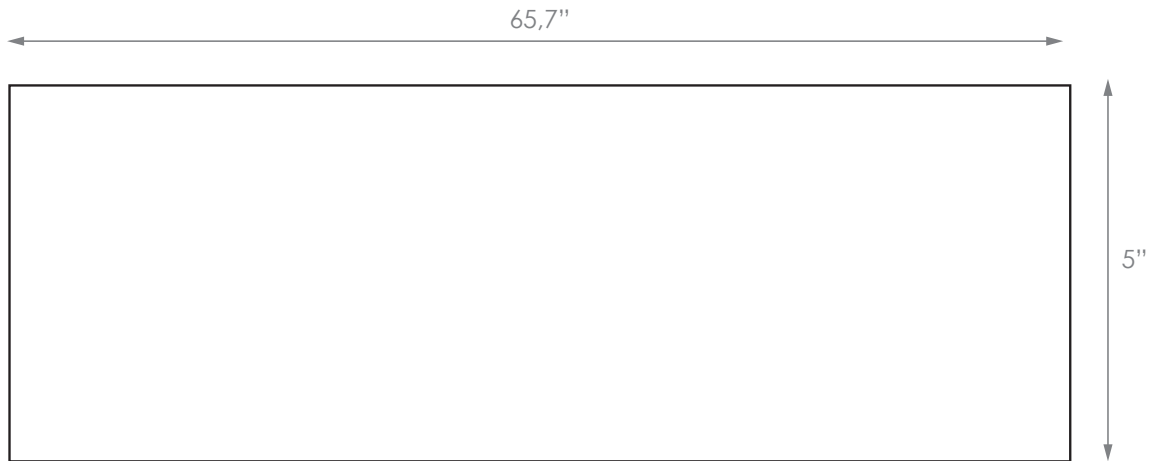

Measures in inches