

W-S PATCH PEEL AND STICK


DESCRIPTION: Self-adhesive waterproofing membrane patch made of WATER-STOP. Offers an easier and faster alternative to other conventional solutions.

USE: Joint sealing.

NORMATIVE REFERENCES: ANSI A118.10, ANSI A118.12, TCNA Handbook; IAPMO Listed Product File Number 9205 9990.

REFERENCES:

| REF. | DESCRIPTION | SIZE |
|---------|--------------------------|---------|
| IGU6032 | W-S PATCH PEEL AND STICK | 4" x 4" |



TEST TABLE:

| PROPERTY | TEST METHOD | VALUE |
|--------------------------------|--------------------|-------------------------------|
| Seam Strength | ASTM D 751 | 24 lbs./in. |
| Breaking Strength Transverse | ASTM D 751 Proc. B | 1420 psi |
| Breaking Strength Longitudinal | ASTM D 751 Proc. B | 1160 psi |
| Dimensional Stability | ASTM D 1204 | ±0.2% |
| Waterproofness | ASTM D 4068 | Pass |
| Water Vapor Transmission | ASTM E96 Proc. E | 0.3 Perm |
| Crack Resistance | ANSI 118.12 | Rated Standard Performance |
| Service Requirement | ASTM C627-10 | Rated Light commercial (TCNA) |
| Shear Strength | | |
| 7- Day Dry | ASTM C482 | 119 psi |
| 7- Day Water Immersion | | 83 psi |
| 4- Week | | 133 psi |
| 12- Week | | 138 psi |
| 100- Day Water Immersion | | 85 psi |
| Resistance to temperature | | -22°F / +176°F |
| Total thickness (approximate) | EN 1849-2 | 20 mils |


AREAS OF APPLICATION:

W-S Patch Peel and Stick is suitable for the following intended uses:

- » Flat, clean surfaces with no water pressure.
- » Joint between W-S BOARD and W-S BOARD.
- » Covering metallic washers and joints between W-S BOARD and W-S NICHE.
- » DO NOT use between floor and wall or in corners.

TECHNICAL DRAWINGS:

W-S PATCH PEEL AND STICK

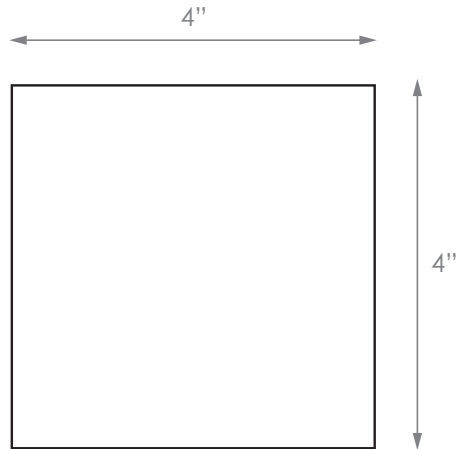

Measures in inches