


W-S BAND

DESCRIPTION: Accessory for reinforcing joints during the installation of GURU waterproofing systems.

USE: For waterproofing joints between Water-Stop membranes or W-S BOARD panels.

NORMATIVE REFERENCES: ANSI A118.10, ANSI A118.12, TCNA Handbook; Uniform Plumbing Code (UPC®) and National Plumbing Code of Canada. IAPMO Listed Product File Number 9205 and 9990.



MANUFACTURER: GURU USA L.L.C.

REFERENCES:

REF.	DESCRIPTION	MEASURE
IGU6100	W-S BAND 14	Roll 5'-1/2" x 65' 8"
IGU6200	W-S BAND 34	Roll 13'-1/3" x 65' 8"



TEST TABLE:

PROPERTY	TEST METHOD	VALUE
Seam Strength	ASTM D 751	24 lbs./in.
Breaking Strength Transverse	ASTM D 751 Proc. B	1420 psi
Breaking Strength Longitudinal	ASTM D 751 Proc. B	1160 psi
Dimensional Stability	ASTM D 1204	±0.2%
Waterproofness	ASTM D 4068	Pass
Water Vapor Transmission	ASTM E96 Proc. E	0.3 Perm
Crack Resistance	ANSI 118.12	Rated Standard Performance
Service Requirement	ASTM C627-10	Rated Light commercial (TCNA)
Shear Strength		
7- Day Dry	ASTM C482	119 psi
7- Day Water Immersion		83 psi
4- Week		133 psi
12- Week		138 psi
100- Day Water Immersion		85 psi
Resistance to temperature		-22°F / +176°F
Total thickness (approximate)	EN 1849-2	20 mils

CHECKS DURING PRODUCTION AND/OR ON THE FINISHED PRODUCT:


System 2+ of assessment and verification of constancy of performance according to Directive 89/106/CEE.

Checks on every production batch:

- » Water penetration resistance
- » Traction properties: tearing, elongation and tensile stress
- » Geotextile adherence
- » Visible defects, length, width and weight

TECHNICAL DRAWINGS:

W-S BAND 14

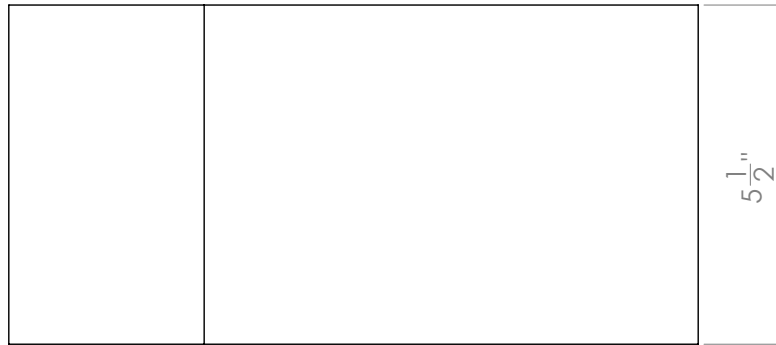

Measures are in inches

W-S BAND 34



Measures are in inches